Yealink

360° All-in-one Intelligent Camera SmartVision 60

Unboxing Video

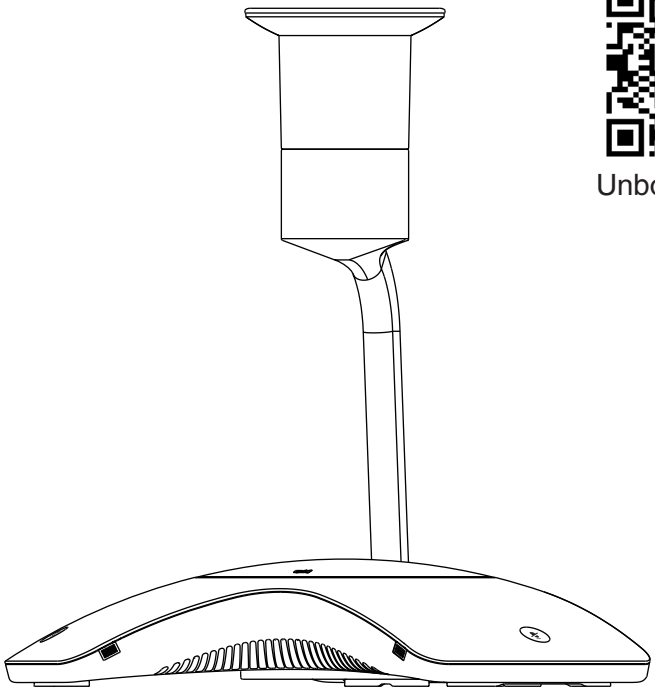

English| 简体中文 |DEUTSCH|ESPAÑOL|FRANÇAIS

Quick Start Guide (V1.2)

1 Package Contents

EN



SmartVision 60

(3m, 9.84ft)

USB 3.1(A-C) Cable

(1.8m, 5.91ft)

Power Adapter (15V/2.4A)

WH-85*3.0

Screwdriver

× 4

3*5CMHZN3+

× 2

Long Sticky Pad

× 2

Short Sticky Pad

Quick Start Guide

(15m, 49.21ft)

or

(30m, 98.43ft)

USB 3.1(A-C) Cable (optional)

Note: We recommend that you use the accessories provided or approved by Yealink. The use of unapproved third-party accessories may result in poor performance.

2 Hardware Introduction





No.	Name	Description
1	Mute Button & Mute LED Indicator	Touch to mute or unmute.
2	Camera Button & Camera LED Indicator	Touch to turn the camera on or off.
3	DC15 V	Connect to the power adapter.
4	USB-C Port	Connect to the MCore Pro.
5	Reset Button	Reset to factory defaults.
6	Security Slot	Connect a universal security cable to the SmartVision 60 so that you can lock it down.
7	Circular LED Indicator	Indicate the device status and Cortana status.
8	Privacy Cap	Automatically cover the camera when it is turned off.
9	Camera	Camera.

3 *LED Indicator*

• Mute LED indicator

LED Status	Description
Off	The device is powered off. The device is idle.
Solid green	Unmuted in the meeting.
Flash green	Incoming call/meeting.
Solid red	Muted in the meeting.
Flash red	The device is entering recovery mode for firmware upgrade.
Solid orange	The device is starting up.
Flash orange	The firmware is updating.

• Camera LED indicator

LED Status	Description
Off	The device is powered off. The device is idle. The camera privacy cover is closed.
Solid purple	The camera privacy cover is open in the meeting.

• Circular LED indicator

LED Status	Description
Off	The device is powered off.
Solid white	The device is idle.
White breathing light	Cortana Listening status.
Half of the LED flashes, with the first segment in blue and the second segment in white	Cortana Thinking status.
Blue and white breathing light flash alternately	Cortana Response status.

4 *Installation*

• Assemble your SmartVision 60







• Paste on a table





Pay attention to the front and back of the sticker.



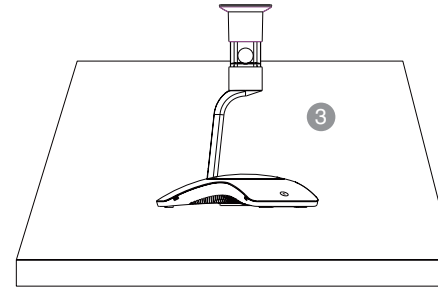

The SmartVision 60 uses two 180° lenses to stitch together a 360° image. Due to the optical properties of the lenses, the clarity of the image at the two lenses are stitched point may be slightly less than the the centre of the lens. To ensure image clarity for people sitting opposite the TV. Please rotate the SmartVision 60 by 15-20°. We recommend the following two solutions:

• Place SmartVision 60 in a Meeting Room (9 people)

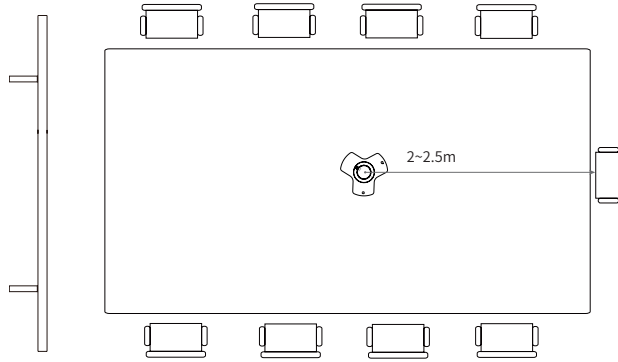

SmartVision 60 is deployed in the middle of the conference table.The arrow sticker points to the corner of the conference table.

• Place SmartVision 60 in a Meeting Room (10 people)

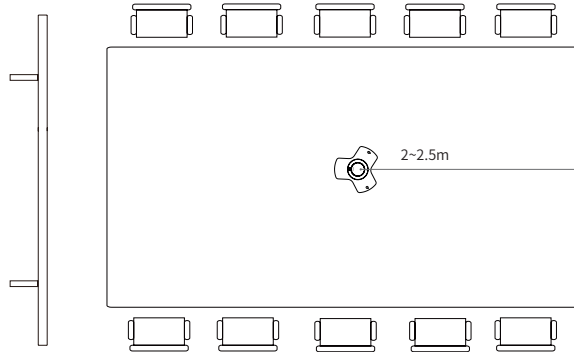

SmartVision 60 is deployed in the middle of the conference table.The arrow sticker points to the TV, meaning the cable management slots are facing towards the TV.

Note: The distance between the SmartVision 60 and the seats should be around 2~2.5 meters for optimal audio and video effects.

5 *Connection*

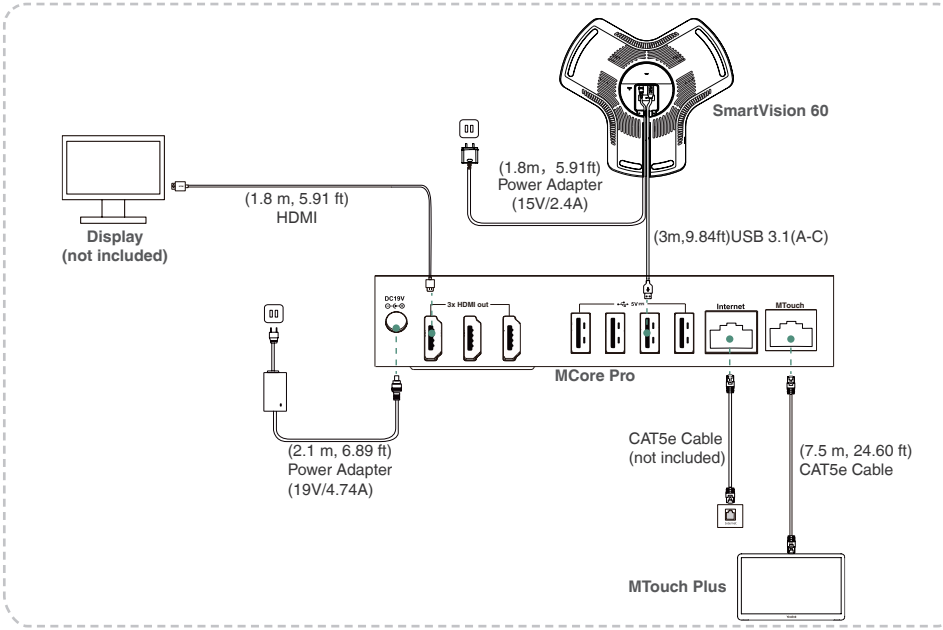

Note:

» Before powering on, make sure to remove the stickers covering the privacy cover to prevent the motor from jamming.

Not included accessories requirements:

» Display: Resolution of 1080p or higher and with an HDMI port.

» Ethernet cable: CAT5e or higher ethernet cable.

6 How to Use

• Calibrate to Ignore room monitors

One MUST calibrate the SmartVision 60 to avoid camera detecting faces on monitors and rendering them on IntelliFrame. Without calibration the images in the room and faces on the monitor. Please refer to Microsoft's documentation for the operation steps and download all files at https://aka.ms/IntelligentCamera.

Microsoft's documentation

• Mute/Umute SmartVision 60

1. Press the **Mute button** to mute the microphone. The mute LED indicator turns red.
2. Press the **Mute button** again to unmute the microphone. When the device is in standby mode, the mute LED indicator is off. When the device is on a call/in a meeting, the mute LED indicator turns green.

• Turn On/Off the Camera

1. Press the **Camera button** to open the camera. The camera LED indicator turns purple, and the camera privacy cover opens automatically.
2. Press the **Camera button** again to close the camera. The camera LED indicator turns off, and the camera privacy cover closes automatically.

• Update SmartVision 60

After the SmartVision 60 is connected and powered on, if the firmware version of SmartVision 60 is not the latest, SmartVision 60 will automatically check for available firmware periodically and upgrade when the device is not in use.

You can also update SmartVision 60 manually through the Yealink RoomConnect software.

1. Connect the SmartVision 60 to the computer or MCore Pro, and the Yealink RoomConnect software can recognize it.
2. Select the SmartVision 60 card and go to **Update Device** > **Update Manually**.
3. Download the latest firmware package for SmartVision 60 to your local device, and then select **Browse** to upload the file.

• Lens Calibration

Before using, you can check the camera view of the SmartVision 60 through Yealink RoomConnect software if stitching calibration is needed.

1. Open the Yealink RoomConnect software to select the Smart Vision 60 product card.
2. Select **Stitching Calibration** menu to calibrate the stitching as needed.

Regulatory Notices

Operating Ambient Temperatures

- Operating temperature: +32 to 104°F (0 to 40°C)
- Relative humidity: 5% to 90%, noncondensing
- Storage temperature: -22 to +158°F (-30 to +70°C)

Warranty

Our product warranty is limited only to the unit itself, when used normally in accordance with the operating instructions and the system environment. We are not liable for damage or loss resulting from the use of this product, or for any claim from a third party. We are not liable for problems with Yealink device arising from the use of this product; we are not liable for financial damages, lost profits, claims from third parties, etc., arising from the use of this product.

DC symbol

⎓ is the DC voltage symbol.

Restriction of Hazardous Substances Directive (RoHS)

This device complies with the requirements of the EU RoHS Directive. Statements of compliance can be obtained by contacting support@yealink.com.

Safety Instructions

Save these instructions. Read these safety instructions before use! The following basic safety precautions should always be followed to reduce risk of fire, electrical shock, and other personal injury.

General Requirements

- Before you install and use the device, read the safety instructions carefully and observe the situation during operation.
- During the process of storage, transportation, and operation, please always keep the device dry and clean.
- During the process of storage, transportation, and operation, please avoid collision and crash of the device.
- Please attempt not to dismantle the device by yourself. In case of any discrepancy, please contact the appointed maintenance center for repair.
- Without prior written consent, no organization or individual is permitted to make any change to the structure or the safety design of the device. Yealink is under no circumstance liable to consequences or legal issues caused by such changes.
- Please refer to the relevant laws and statutes while using the device. Legal rights of others should be respected as well.

Environmental Requirements

- Place the device at a well-ventilated place. Do not expose the device under direct sunlight.
- Keep the device dry and free of dusts.
- Place the device on a stable and level platform.
- Please place no heavy objects on the device in case of damageand deformation caused by the heavy load.
- Keep at least 10 cm between the device and the closest object for heat dissipation.
- Do not place the device on or near any inflammable or fire-vulnerable object, such as rubber-made materials.
- Keep the device away from any heat source or bare fire, such as a candle or an electric heater.
- Keep the device away from any household appliance with strong magnetic field or electromagnetic field, such as a microwave oven or a refrigerator.

Operating Requirements

- Do not let a child operate the device without guidance.
- Do not let a child play with the device or any accessory in case of accidental swallowing.
- Please use the accessories provided or authorized by the manufacturer only.
- The power supply of the device shall meet the requirements of the input voltage of the device. Pleaseusethe provided surge protection power socket only.
- Before plugging or unplugging any cable, make sure that your hands are completely dry.
- Do not spill liquid of any kind on the product or use the equipment near water, for example, near a bathtub, washbowl, kitchen sink, wet basement or near a swimming pool.Do not tread on, pull, or over-bend any cable in case of malfunction of the device.
- During a thunderstorm, stop using the device and disconnect it from the power supply. Unplug the power plug and the Asymmetric Digital Subscriber Line (ADSL) twisted pair (the radio frequency cable) to avoid lightning strike.
- If the device is left unused for a rather long time, disconnect it from the power supply and unplug the power plug.
- When there is smoke emitted from the device, or some abnormal noise or smell, disconnect the device from the power supply, and unplug the power plug immediately. Contact the specified maintenance center for repair.
- Do not insert any object into equipment slots that is not part of the product or auxiliary product.
- Before connecting a cable, connect the grounding cable of the device first. Do not disconnect the grounding cable until you disconnect all other cables.

Cleaning Requirements

- Before cleaning the device, stop using it and disconnect it from the power supply.
- Use a piece of soft, dry and anti-static cloth to clean the device.
- Keep the power plug clean and dry. Using a dirty or wet power plug may lead to electric shock or other perils.

ENVIRONMENTAL RECYCLING

Never dispose of the device with domestic waste

Ask your Town Council about how to dispose of it in an environmentally friendly way. The cardboarc box, plastic packaging and player components may be recycled in accordance with prevailing recycling regulations in your country.

Always adhere to prevailing regulations

Those who fail to do so may be fined or prosecuted in accordance with the law. The crossed out garbage can that appears on the device means that when it has reached the end of its useful life, it should be taken to a special waste disposal centre and treated separately to general urban waste.

Troubleshooting

The unit cannot supply power to Yealink device.

There is a bad connection with the plug.

1. Clean the plug with a dry cloth.
2. Connect it to another wall outlet.

The usage environment is out of operating temperature range.

1. Use in the operating temperature range.

The cable between the unit and the Yealink device is connected incorrectly.

1. Connect the cable correctly.

You cannot connect the cable properly.

1. You may have connected a wrong Yealink device.
2. Use the correct power supply.

Some dust, etc., may be in the port.

1. Clean the port.

Contact your dealer or authorized service facility for any further questions.

Contact Information

YEALINK NETWORK TECHNOLOGY CO.,LTD.
No.666 Hu'an Rd,Huli District Xiamen City, Fujian, P.R.C
YEALINK (EUROPE) NETWORK TECHNOLOGY B.V.
Sir Winston Churchillln 299 k, 2288DC Rijswijk
YEALINK (USA) NETWORK TECHNOLOGY CO., LTD.
999 Peachtree Street Suite 2300, Fulton, Atlanta, GA, 30309, USA
Made in China

About Yealink

Yealink (Stock Code: 300628) is a global-leading provider of Unified Communication & Collaboration Solutions specialized in video conferencing, voice communications, and collaboration, dedicated to helping every person and organization embrace the power of "Easy Collaboration, High Productivity".

With best-in-class quality, innovative technology, and user-friendly experiences, Yealink is one of the best providers in more than 140 countries and regions, ranks No.1 in the global market share of IP Phone, and is the Top 5 leader in the video conferencing market (Frost & Sullivan, 2021).

For more information about Yealink, click here.

Copyright

Copyright © 2023 YEALINK(XIAMEN) NETWORK TECHNOLOGY CO., LTD.
All rights reserved. No parts of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Yealink(Xiamen) Network Technology CO., LTD.

Technical Support

Visit Yealink WIKI (http://support.yealink.com/) for firmware downloads, product documents, FAQ, and more. For better service, we sincerely recommend you to use Yealink Ticketing system (https://ticket.yealink.com) to submit all your technical issues.

430104002454

YEALINK NETWORK TECHNOLOGY CO.,LTD.
Web: www.yealink.com
Addr: No.666 Hu'an Rd,Huli District Xiamen City, Fujian, P.R. C
Copyright©2023 Yealink Inc. All rights reserved.