




Video Conferencing Microphone Array VCM35 Pro

Quick Start Guide **V1.0**

Contents

01 English	-----	03
02 Deutsch	-----	06
03 Français	-----	09
04 Español	-----	12

Package Contents

EN



VCM35 Pro



(φ81*T1 mm)
Cable Cover



(φ50*T1.55 mm)
Double-sided
adhesive



(3 m, 9.84 ft)
CAT5e UTP
(RJ45 - RJ45)
Cable




2*3FMOZN(+)
Screw *2




Quick Start
Guide

Connect the VCM35 Pro

Connect a microphone to the VCH port of the host.

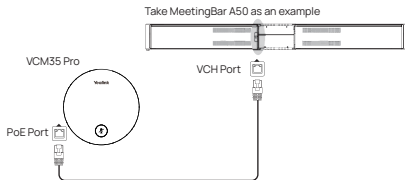

Cascade multiple microphones. The maximum number of supported microphones depends on the host.

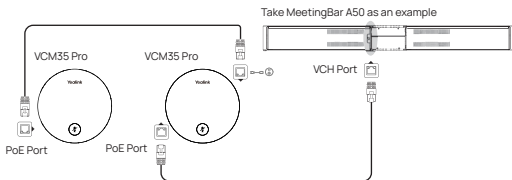


Number of microphones*	Distance limitation
1	70 m
1+1	65 m
1+2	65 m
1+3	65 m


* Up to four microphones can be connected in a single daisy chain. For more than four microphones, the system must be split into two daisy-chain branches.

Install the VCM35 Pro

- 1 Before installing the VCM35 Pro, connect the cables first.




- 2 Attach cable cover to the VCM35 Pro using the supplied screws.



- 3 Attach the double-sided adhesive to the cable cover, and then remove the protective film.



- 4 Put the VCM35 Pro on the table and press it firmly to secure it.



Mute or Unmute the VCM35 Pro

1. Tap the mute button to mute it.
The mute LED indicator glows red.
2. Tap the mute button again to unmute it.
 - When the system is idle, the mute LED indicator turns off.
 - When the system is in a call, the mute LED indicator glows green.

Mute LED Instruction

LED Status	Description
Off	• The VCM35 Pro is not powered on. • The VCM35 Pro is not started.
Solid red	The VCM35 Pro is muted.
Fast flashing red	Network connection error.
Solid orange	The VCM35 Pro is starting up. The VCM35 Pro is not connected to the host.
Flashing orange	The VCM35 Pro is upgrading.
Fast flashing orange	No IP address obtained.
Solid green	The VCM35 Pro is enabled.
Flashing green	The VCM35 Pro is ringing.
Flashing red and green alternately	The VCM35 Pro is in device locating mode.