



> MAXHUB XBar W70 Kit

The industry's first Windows-based Teams Rooms videobar with a 200MP Quad Sight lens and integrated FlexMount - an all-in-one design ideal for medium to large rooms.

Certified for Microsoft Teams Windows 11

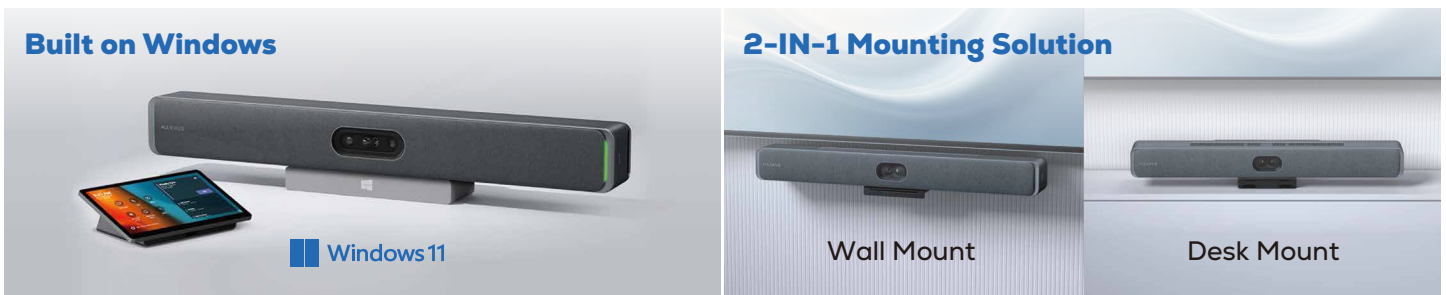

Every Detail Every Angle

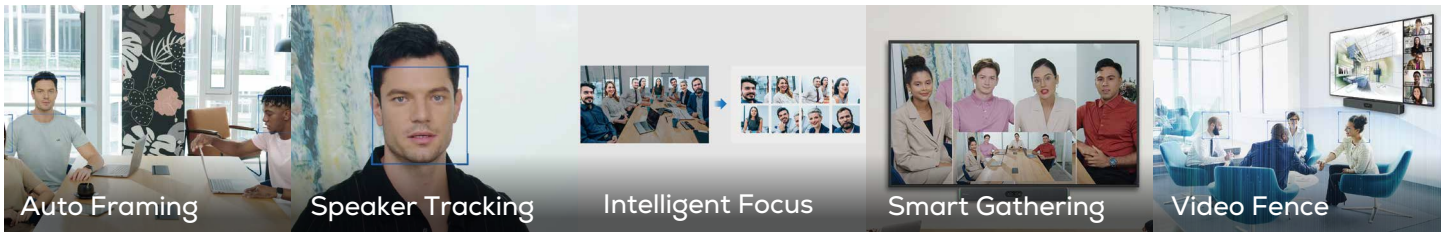

Every Word Made Clear



XBar W70

Camera

Camera Quantity	4
Pixel	50MP × 4
Sensor	1/1.55 inch
Aperture	F/2.4

Resolution & Frame Rate

H.264 / MJPEG	3840 × 2160, 2560 × 1440, 1920 × 1080, 1280 × 720, 1024 × 576, 960 × 540, 800 × 600, 640 × 360
YUY2	1920 × 1080, 1280 × 720, 640 × 360
ZOOM	8x hybrid Zoom
Wide Camera	130° (D), 125° (H), 50° (V)
Telephoto Camera	52° (D), 42° (H), 32° (V)
Privacy Shutter	Electrical and automatical lens shutter
AI Feature	Auto Framing Speaker Tracking Intelligent Focus Smart Gathering Video Fence

General Information

CPU	Intel® Core™ i5-1240P Processor
Memory	16 GB
Storage	256 GB
Graphic	Intel® UHD Graphics for 12th Gen Intel® Processors

Operating System

Operating System	Windows 11 IoT Enterprise SAC
Application	Microsoft Teams Room

Network

Wi-Fi	Wi-Fi 6, 2×2 MIMO
Wi-Fi Protocol	802.11 a/ b/ g/ n/ ac/ ax
Working Band	2.4 GHz + 5 GHz
Working Mode	STA
Bluetooth	5.2 + BLE
Network	1000 Mbps

Power

Power Adapter	AC 100-240 V Input and DC 19V/ 10A Output
---------------	---

Physical Specification

Product Dimension (L×W×H)	840.6 × 117.6 × 104 mm / 33.1 × 4.6 × 4.1 in
Net Weight	5.0 kg / 11.0 lb

Speaker

Speaker Quantity	2
Sound Channel	2.0
Total Power (Max.)	20W + 20W
Sensitivity	100dB SPL @20W, +/-3dB at 1/2 meter
Sound Pressure (Max.)	89dB SPL@20W, +/-3dB at 1/2 meter
Frequency Range	80 Hz ~ 20 KHz

Microphone

Microphone Quantity	16-mic array
Pickup Range	10 m
Frequency Range	20 Hz ~ 16 KHz
Sensitivity	-36 ± 1 dBFS
Sampling	48 KHz
Expansion	Supports 2 expansion microphones
AI Feature	Noise Reduction Echo Cancellation Anti-Reverberation AEC (Acoustic Echo Cancellation) ANS (Automatic Noise Suppression) AGC (Automatic Gain Control) Full-duplex

Input/Output Port

USB 3.0 Type-A × 1	To connect third-party device for audio input
USB 2.0 Type-A × 1	For firmware update and debug
HDMI Out × 3	Up to 4K@60Hz, CEC supported
HDMI In × 1	Up to 4K@60Hz
RJ45 (Internet) × 1	For internet connection
RJ45 (M Link) × 1	For BYOD wired connection
RJ45 (Console) × 1	To connect the touch console
RJ45 (Ext) × 1	To connect MAXHUB exclusive accessories (microphone, camera, etc.)
DC In × 1	For 19V power input power supply

Accessories

Power Adapter	× 1
AC Cable (1.5m / 4.9ft)	× 1
HDMI Cable (3m / 9.8ft)	× 2
Ethernet Cable (3m / 9.8ft)	× 1
Ethernet Cable (7.5m / 24.6ft)	× 1
Mounted Components	× 1

Touch Console TCP31T

Display

Size	11.6 inch
Resolution	1920 × 1080
Frequency Refresh Rate	60 Hz
Backlight Unit	ELED
Brightness With Glass	250 nits (Min.) 300 nits (Max.)
Life Time	≥ 20000 hours

Touch System

Type	Capacitive touch
Surface Treatment	Anti-fingerprint, Anti-glare

Standard Accessories

USB-C Cable (1.8 m / 5.9 ft)	× 1
Ethernet Cable (7.5 m / 24.6 ft)	× 1
Screwdriver	× 1

Input/Output Port

RJ45 (To Bar)	× 1
USB-A 2.0 (For USB Audio accessories)	× 1
Type-C (Ingest)	× 1
RJ45 (M Link)	× 1
USB 2.0 (Pairing wireless dongle)	× 1
Audio Out (3.5 mm)	× 1

Physical Specification

Product Dimension (L×W×H)	278 × 164 × 82.4 mm / 11 × 6.4 × 3.2 inch
Product Weight	1.16 kg / 2.56 lb

Sensor

Motion Sensor	PIR sensor for automatic wake-up
---------------	----------------------------------

Optional Accessories

Wall-Mounted Kit (TCP30WM Bracket)	× 1
------------------------------------	-----

Statement: Product specifications and appearance may vary and are subject to change without notice.