


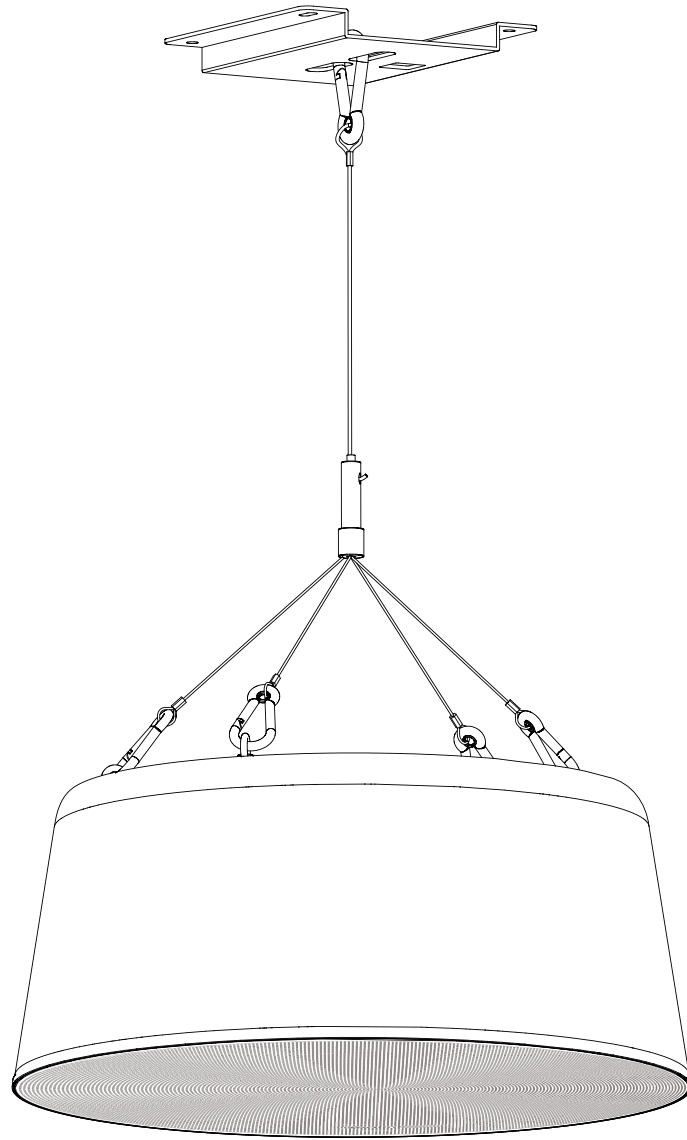

CS-PendantMount

English | Deutsch | Français | Español


Quick Start Guide V1.0

Contents


01 English	01
02 Deutsch	06
03 Français	11
04 Español	16

Package Contents


EN

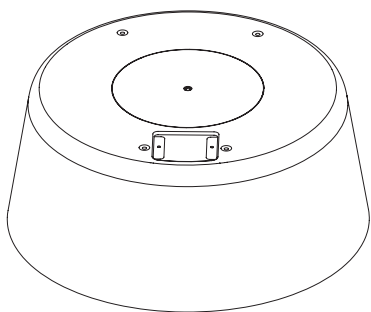


Pendant Cover




Pendant Bracket

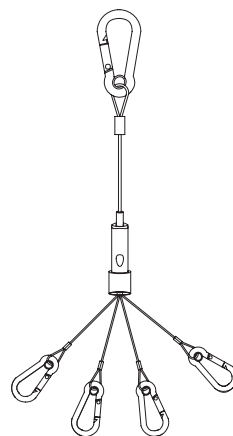

Pendant Rope



Dust Cover



x4

Ring Screw




x2

Dust Cover Screw



x4



x4

Expansion Nuts and
Screws




Note: We recommend that you use the accessories provided or approved by Yealink.


Installation

i Note: The load-bearing capacity of the ceiling must be greater than 4.7 kg per square meter.


- ① Use the pendant bracket to mark the holes, drill the holes, and insert the expansion nuts at the corresponding positions.

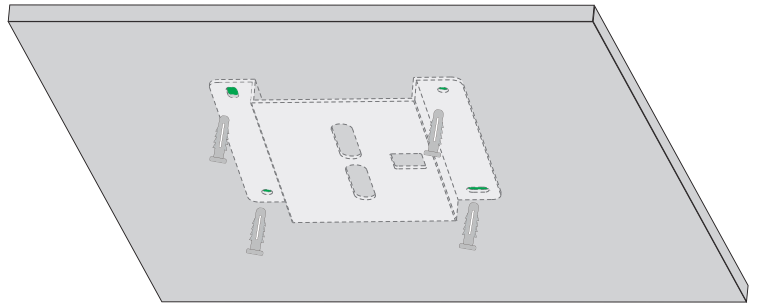


- ② If network cables are routed from the ceiling, pass the cables through the hole on the right side of the bracket. Fix the pendant bracket with the expansion screws.

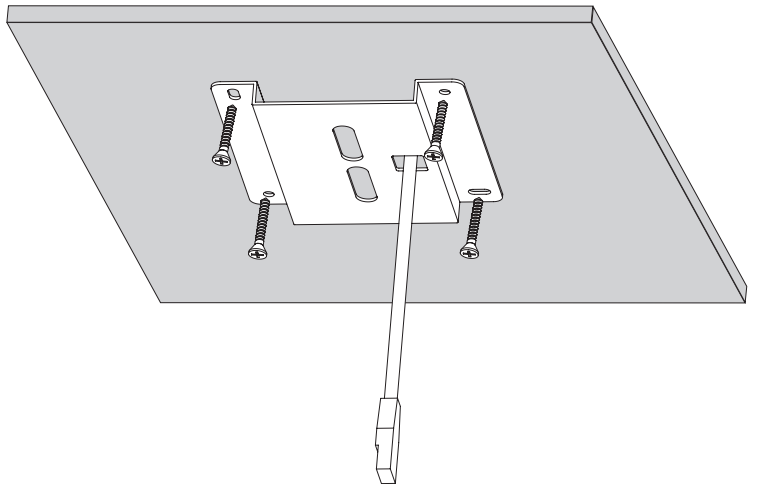


- ③ **1:** Pass the end of safety rope through the hole in the mesh cover.
2: Then thread the other end of the safety rope through the hole on the CS10/CS10-D.
3: Next, pass the safety rope through the washer and use pliers to secure the washer.
Attach the mesh cover magnetically to the CS10/CS10-D.

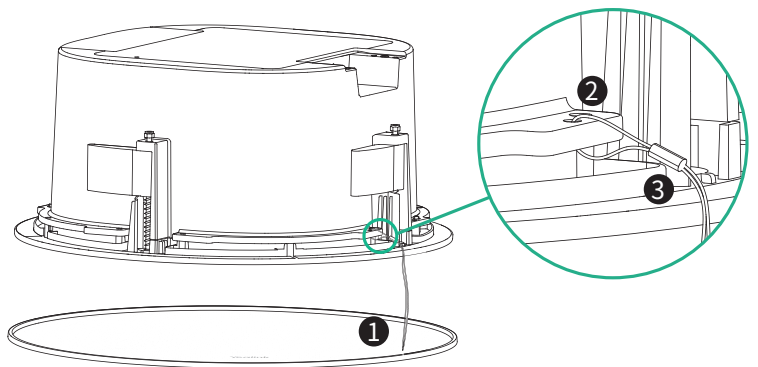


- ④ Remove the two screws from the CS10/CS10-D.

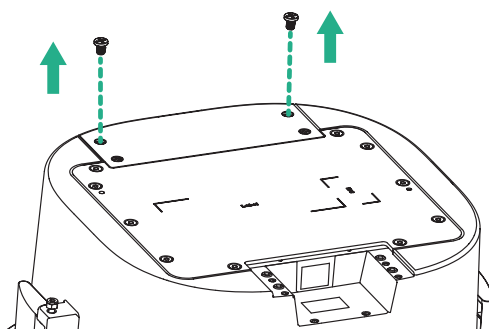


- ⑤ Place the pendant cover over the CS10/CS10-D.

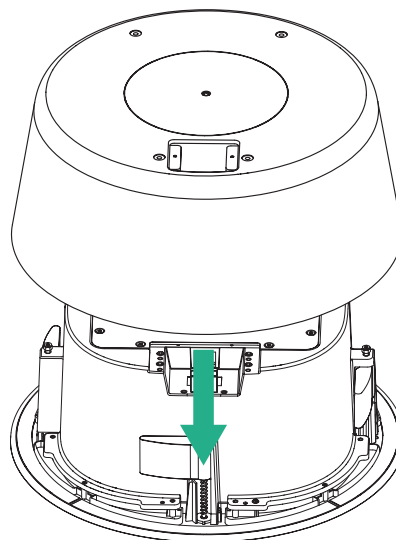


- ⑥ Use the ring screw to lock the pendant cover and the CS10/CS10-D securely.

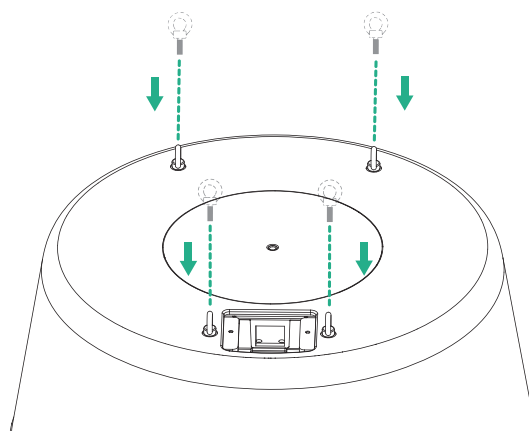


- ⑦ Attach the four carabiners at the bottom of the pendant rope to the ring screw.

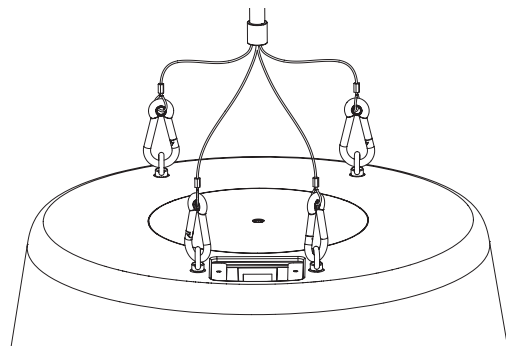


- ⑧ Adjust the pendant rope to the appropriate length.
- A**(To shorten): Pull out the pendant rope.
- B**(To lengthen): Press the connector section, then pull the pendant rope from above.

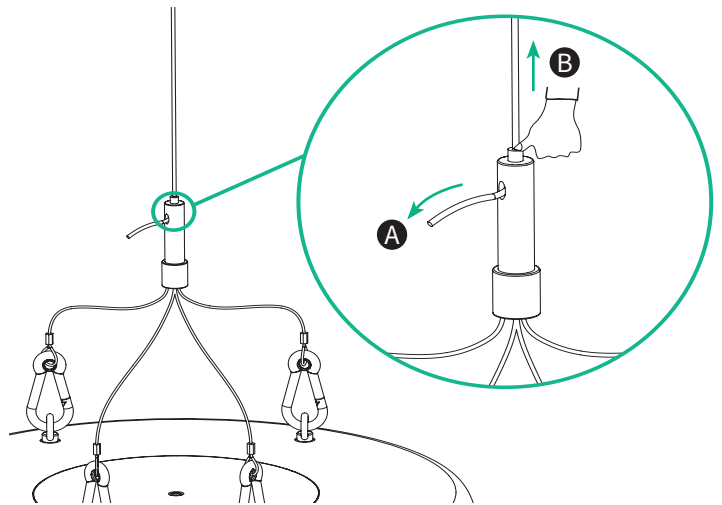


- ⑨ Attach the carabiner at the top of the pendant rope to the pendant bracket.




- ⑩ Insert the network cable into the Ethernet port of the CS10/CS10-D.

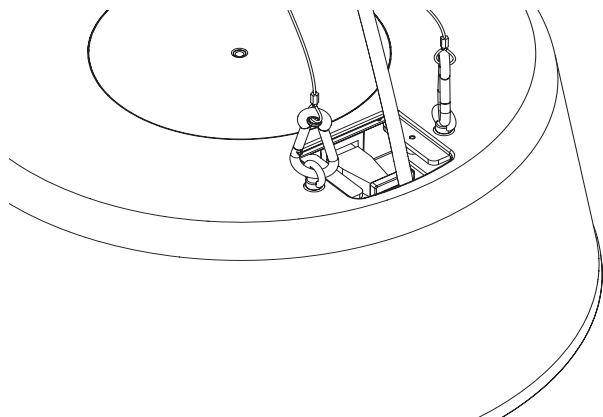

- ⑪ Place the dust cover on and secure it with the dust cover screw.

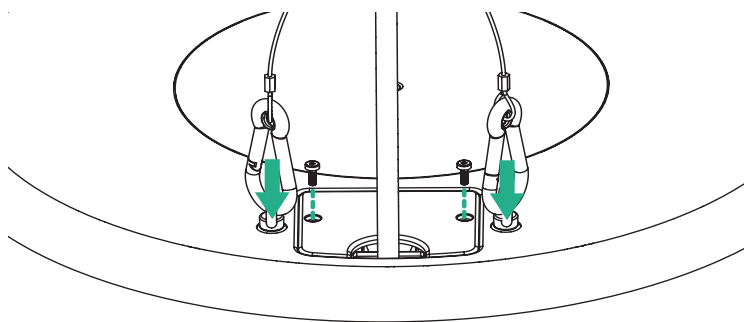

- ⑫ Installation completed.

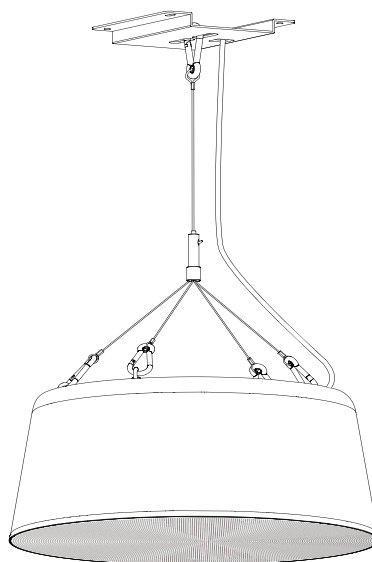

About Yealink

Yealink (Stock Code: 300628) is a global-leading provider of Unified Communication & Collaboration Solutions specialized in video conferencing, voice communications, and collaboration, dedicated to helping every person and organization embrace the power of "Easy Collaboration, High Productivity".

With best-in-class quality, innovative technology, and user-friendly experiences, Yealink is one of the best providers in more than 140 countries and regions, ranks No.1 in the global market share of IP Phone, and is the Top 5 leader in the video conferencing market (Frost & Sullivan, 2021).

Technical Support

Visit Yealink WIKI (<http://support.yealink.com/>) for firmware downloads, product documents, FAQ, and more. For better service, we sincerely recommend you to use Yealink Ticketing system (<https://ticket.yealink.com>) to submit all your technical issues.



430104003388

YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.

Web: www.yealink.com

Addr: No.666 Hu'an Rd,Huli District Xiamen City, Fujian, P.R.C

Copyright©2025 Yealink Inc. All rights reserved.