




Installation Video

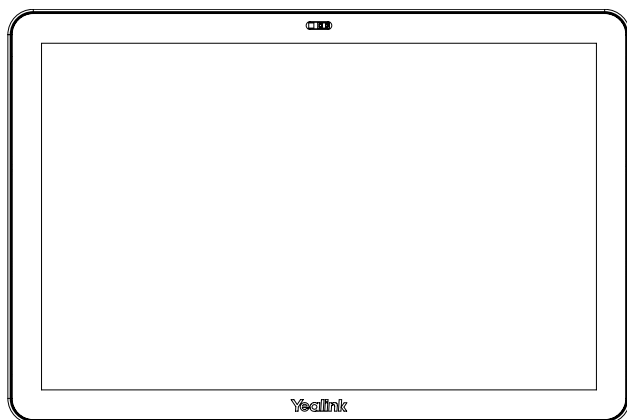


CTP25 Quick Start Guide V1.2

English | DEUTSCH | FRANÇAIS | ESPAÑOL

Content

English.....	1
Deutsch.....	7
Français.....	13
Español.....	19


Package Contents



CTP25




(7.5m, 24.6ft)
CAT5e UTP
(RJ45 - RJ45) Cable



(1.8m, 5.91ft)
USB 3.1 (C - C) Cable




(WH-85*3.0mm)
Screwdriver




High Stand




M3 Screw
x 10




Cable Management
Cover



Quick Start
Guide




(2m, 6.56ft)
PD Power Adapter



(20 * 200 mm)
Cable Ties

Mounting Brackets (Optional)



Low Stand
(Lock device)






Table Lock Kit



Wall Mount-A
(Lock device)



Wall Mount-B
(Wall mount)

Rotatable Desktop Bracket

Wall Rack



M3 Screw
x 15



φ6 * 30 mm,
Expansion bolt
x 6



T4x30, Self-
tapping screws
x 6




(WH-85*3.0mm)
Screwdriver




(129.74*96.45mm)
3M Tape

Hardware Introduction

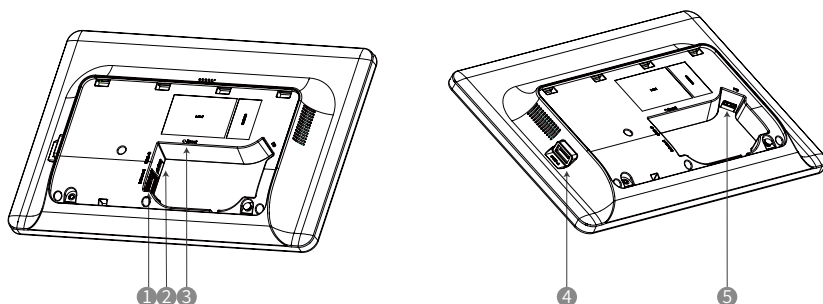

- 1 Internet: Connect to an endpoint, network, or PoE switch that meets the specifications of 802.3af and above.
- 2 USB-C: Connect to a PC for content sharing. When connected to a PD power adapter, CTP25 can power the PC.
- 3 Reset: Reset the CTP25 to factory defaults.
- 4 USB-A: Reserved interface.
- 5 PD: Connect to a PD power adapter.


Connection

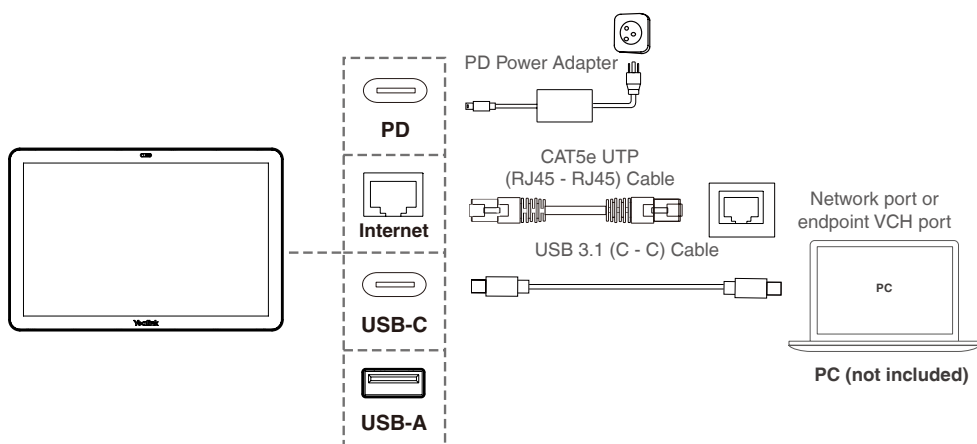


Installation

• Place on the Table


- 1 Screw specifications:
M3 screw



- 2 Recommended cable management method:

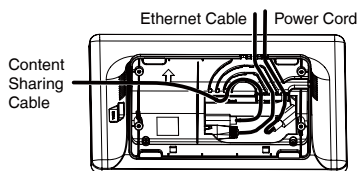


- 3 Screw specifications:
M3 screw

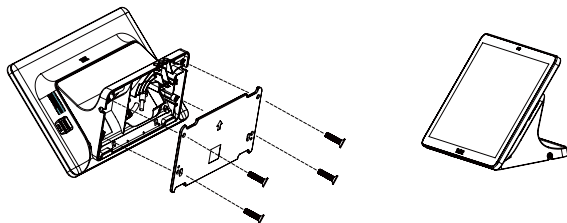


• Mount on the Table (Optional)


- 1 Screw specifications:
M3 screw





- 2 Recommended cable management method:



- 3 Screw specifications:
M3 screw




- 4 Make sure the two arrows on the table mount are aligned.



• Mount on the Wall (Optional)


- We recommend that the height of the wall-mounted is 1m~1.5m from the ground.
- If the conference room environment allows, you can also wire through the wall.

- 1 Screw specifications:
φ6 * 30 mm, Expansion bolt




Hole depth: 30mm
Hole diameter: 6mm


- 2 Screw specifications:
T4×30, Self-tapping screws




- 3 Screw specifications:
M3 Screw




- 4 (Surface-mounted conduit)
Recommended cable management method:




- (Pattress)
Recommended cable management method:

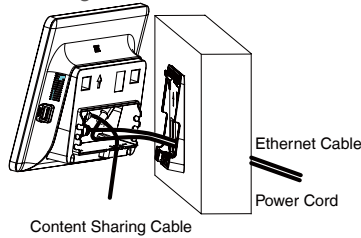

- 5




- 6 Screw specifications:
M3 screw



Pair with an Endpoint


• Connection on the Same LAN

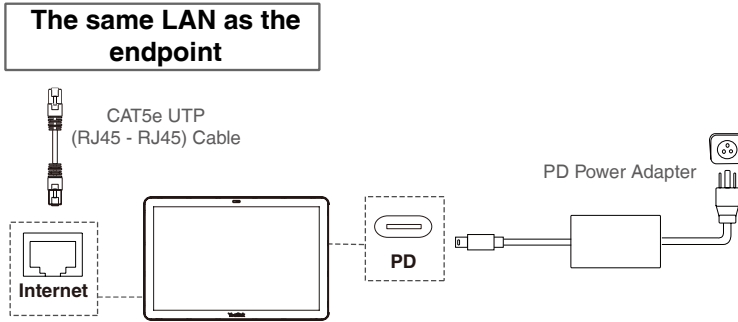

1. Connect CTP25 to the PD power adapter.
2. Connect CTP25 to the same LAN as the endpoint.
3. Enter the endpoint IP address and PIN code according to the on-screen prompts in the CTP25, then the system will be automatically paired with the CTP25.
4. Log in to the account.

• Direct Connection with an Ethernet Cable

💡 Some endpoints do not support direct connection with CTP25. For more information, refer to the endpoint quick start guide.

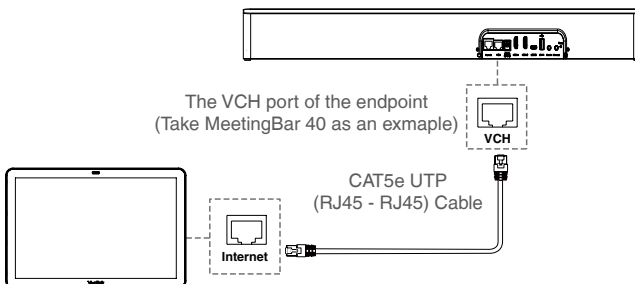


1. Use an Ethernet cable to connect the Internet port of CTP25 and the VCH port of the endpoint. CTP25 and the endpoint will be paired automatically.
2. Synchronize the endpoint account on CTP25 according to the on-screen prompts.

Content Sharing/BYOD



The support for content sharing/BYOD mode depends on the capabilities of the endpoint model. For more information, refer to the endpoint quick start guide.

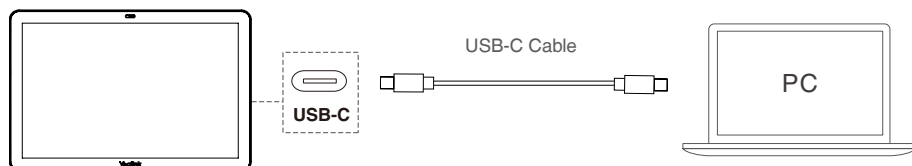


Content Sharing

Use a USB-C cable to connect CTP25 and the PC, and then share content immediately.

BYOD

Use a USB-C cable to connect the CTP25 and the PC. A prompt pops up on the CTP25 asking whether to enter BYOD. Click **OK**.

Lieferumfang



CTP25




(7.5m, 24.6ft)
CAT5e UTP
(RJ45 - RJ45) Kabel



(1.8m, 5.91ft)
USB 3.1 (C - C) Kabel




(WH-85*3.0mm)
Schraubendreher




Hochwinkelhalterung




M3 Schraube




Kabelmanagement-
Abdeckung



Kurzanleitung




(2m, 6.56ft)
PD-Netzteil





(20 * 200 mm)
Kabelbinder


Halterung zur Wandmontage (optional)



Niedrigwinkelhalterung Tischverriegelungssatz
(Sperrgerät)



Wandmontage
(Sperrgerät)



Wandmontage
(Wandhalterung)

Drehbarer Desktop-Halter

Wandregal



× 15

M3 Schraube



× 6

φ6 * 30 mm,
Spreizdübel



× 6

T4x30,
selbstschneidende
Schrauben



(WH-85*3.0mm)
Schraubendreher



(129,74*96,45 mm)
3M-Klebeband

Regulatory Notices

Operating Ambient Temperatures

- Operating temperature: +32 to 113°F (0 to 45°C)
- Relative humidity: 5% to 90%, noncondensing
- Storage temperature: -22 to +158°F (-30 to +70°C)

Warranty

Our product warranty is limited only to the unit itself, when used normally in accordance with the operating instructions and the system environment. We are not liable for damage or loss resulting from the use of this product, or for any claim from a third party. We are not liable for problems with Yealink device arising from the use of this product; we are not liable for financial damages, lost profits, claims from third parties, etc., arising from the use of this product.

DC symbol

— is the DC voltage symbol.

Restriction of Hazardous Substances Directive (RoHS)

This device complies with the requirements of the EU RoHS Directive. Statements of compliance can be obtained by contacting support@yealink.com.

Safety Instructions

Save these instructions. Read these safety instructions before use!

The following basic safety precautions should always be followed to reduce risk of fire, electrical shock, and other personal injury.

Environmental Requirements

- Place the product on a stable, level and non-slip surface.
- Do not place the product close to heat sources, in direct sunlight or next to any house hold appliance with strong magnetic field or electromagnetic field, such as a microwave oven or a refrigerator.
- Do not allow the product to come into contact with water, dust and chemicals.
- Protect the product from aggressive liquids and vapors.
- Do not place the product on or near any inflammable or fire-vulnerable object, such as rubber-made materials.
- Do not install the product in rooms with high humidity, for example, in bathrooms, laundry rooms and wet basements.

Safety Notes During Operation

- Use only spare parts and accessories supplied or authorized by Yealink. The operation of non-authorized parts cannot be guaranteed.
- Do not place heavy objects on top of the handset or the base station in case of damage and deformation caused by the heavy load.
- Do not open the handset or the base station by yourself for repair purpose, which could expose you to high voltages. Have all repairs carried out by authorized service personnel.
- Do not let a child operate the product without guidance.
- Keep the small accessories contained in your product out of reach of small children in case of accidental swallowing.
- Before plugging or unplugging any cable, make sure that your hands are completely dry.
- Do not hold the handset up to your ear when speakphone is on or when the ringer is ringing as the volume can be very loud, which may be harmful to your hearing.
- During a thunderstorm, stop using the product and disconnect it from the power supply to avoid lightning strike.
- If the product is left unused for a rather long time, disconnect the base station from the power supply

and unplug the power adapter.

- When there is smoke emitted from the product, or some abnormal noise or smell, disconnect the product from the power supply, and unplug the power adapter immediately.
- Remove the electrical cord from an outlet by pulling gently on the power adapter, not by pulling the cord.

Notices of Cleaning

- Before cleaning the base station, stop using it and disconnect it from the power supply.
- Remove the battery before cleaning the handset to reduce risk of electric shock.
- Only clean your product with a piece of slightly moist and anti-static cloth.
- Keep the power plug clean and dry. Using a dirty or wet power plug may lead to electric shock or other perils.

ENVIRONMENTAL RECYCLING

 Never dispose of the device with domestic waste. Ask your Town Council about how to dispose of it in an environmentally friendly way. The cardboard box, plastic packaging and player components may be recycled in accordance with prevailing recycling regulations in your country.

Always adhere to prevailing regulations

Those who fail to do so may be fined or prosecuted in accordance with the law. The crossed out garbage can that appears on the device means that when it has reached the end of its useful life, it should be taken to a special waste disposal center and treated separately to general urban waste.

Troubleshooting

The unit cannot supply power to Yealink device.

There is a bad connection with the plug.

1. Clean the plug with a dry cloth.

2. Connect it to another wall outlet.

The usage environment is out of operating temperature range.

1. Use in the operating temperature range.

The cable between the unit and the Yealink device is connected incorrectly.

1. Connect the cable correctly.

You cannot connect the cable properly.

1. You may have connected a wrong Yealink device.

2. Use the correct power supply.

Some dust, etc., may be in the port.

1. Clean the port.

Contact your dealer or authorized service facility for any further questions.

Contact Information

YEALINK NETWORK TECHNOLOGY CO.,LTD.

No.666 Hu'an Rd,Huli District Xiamen City, Fujian, P.R. China

support@yealink.com

Made in China

Yealink (Europe) Network Technology B.V.

Keizersgracht 62,1015CS Amsterdam

EUROPE@Yealink.com

YEALINK (USA) NETWORK TECHNOLOGY CO., LTD.

Suite 160, 5445 legacy drive, Plano, Texas, 75024, United States

About Yealink

Yealink (Stock Code: 300628) is a global-leading provider of Unified Communication & Collaboration Solutions specialized in video conferencing, voice communications, and collaboration, dedicated to helping every person and organization embrace the power of "Easy Collaboration, High Productivity".

With best-in-class quality, innovative technology, and user-friendly experiences, Yealink is one of the best providers in more than 140 countries and regions, ranks No.1 in the global market share of IP Phone, and is the Top 5 leader in the video conferencing market (Frost & Sullivan, 2021).

For more information about Yealink, click <https://www.yealink.com>.


Copyright

Copyright © 2024 Yealink(Xiamen) Network Technology CO., LTD.

Copyright © 2024 Yealink(Xiamen) Network Technology CO., LTD. All rights reserved. No parts of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Yealink(Xiamen) Network Technology CO., LTD.

Technical Support

Visit Yealink WIKI (<http://support.yealink.com/>) for firmware downloads, product documents, FAQ, and more. For better service, we sincerely recommend you to use Yealink Ticketing system (<https://ticket.yealink.com>) to submit all your technical issues.



430104002928



YEALINK NETWORK TECHNOLOGY CO.,LTD.
No.666 Hu'an Rd,Huli District Xiamen City, Fujian, P.R. C
Web: www.yealink.com
Copyright©2024 YEALINK(XIAMEN) NETWORK
TECHNOLOGY CO., LTD.All rights reserved.