



1 Minimum Requirements

- A display connected to MCore 4 (not included).
- A Microsoft Teams Rooms account (not included).
- Wired network environment (not included).


2 Package Contents

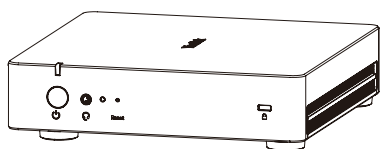


MCore 4 Package



MTouch Plus Package




RoomSensor Package

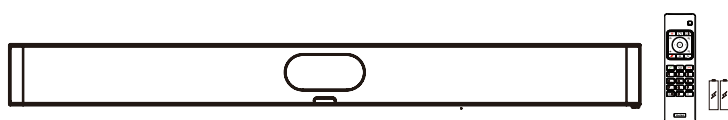


MeetingBar A50 Package


Optional



MeetingDisplay Package



MD-WallMount Package



MD-AVBracket-L Package

*The MD-AVBracket-L is compatible only with the Yealink MeetingDisplay 75/86.


 We recommend using MeetingDisplay, MD-Wallmount and MD-AVBracket-L together.

3 Installation

- MCore 4 supports mounting on the wall, mounting on the TV, putting on a table, or mounting on the MeetingDisplay (optional).
- MTouch Plus supports putting on a table, pasting on a table, fixing on a table, or mounting on the wall.
- RoomSensor supports mounting on the ceiling or mounting on the wall.
- MeetingBar A50 supports mounting on a wall, mounting on the table-top stand, embedding in the wall, mounting on the MeetingDisplay (requires MD-AVBracket-L, optional), or mounting on the VB-TVMount-01 (optional).
- MeetingDisplay supports installing on the MD-WallMount Bracket (optional) or installing on the Electric Lift Stand MB-FS-Lift (optional).


Install MCore 4 on MeetingDisplay (optional)

- i** You need to purchase MeetingDisplay separately. For installation, please refer to the **MeetingDisplay Quick Start Guide** included in the corresponding package.

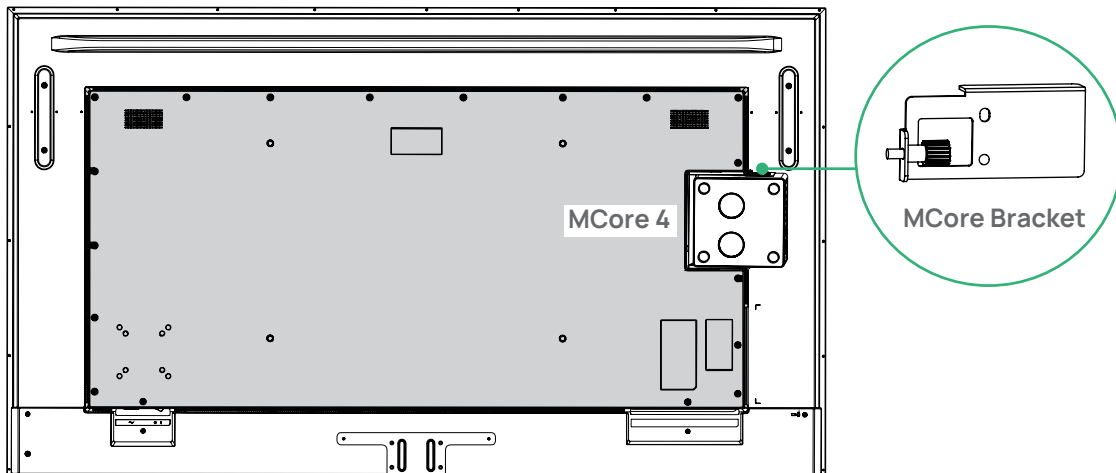


Install MeetingBar A50 on MeetingDisplay (optional)

- i** You need to purchase MeetingDisplay and MD-AVBracket-L separately. For installation, please refer to the **MD-AVBracket-L Quick Start Guide** included in the corresponding package.

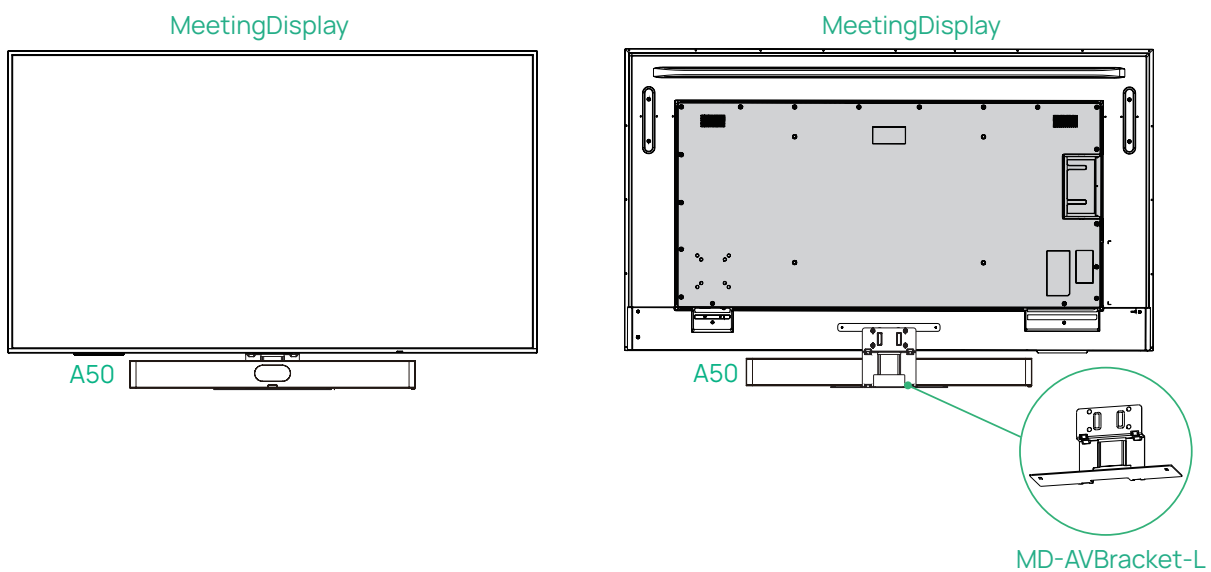

4 Connection


Optional 1: Basic Connection

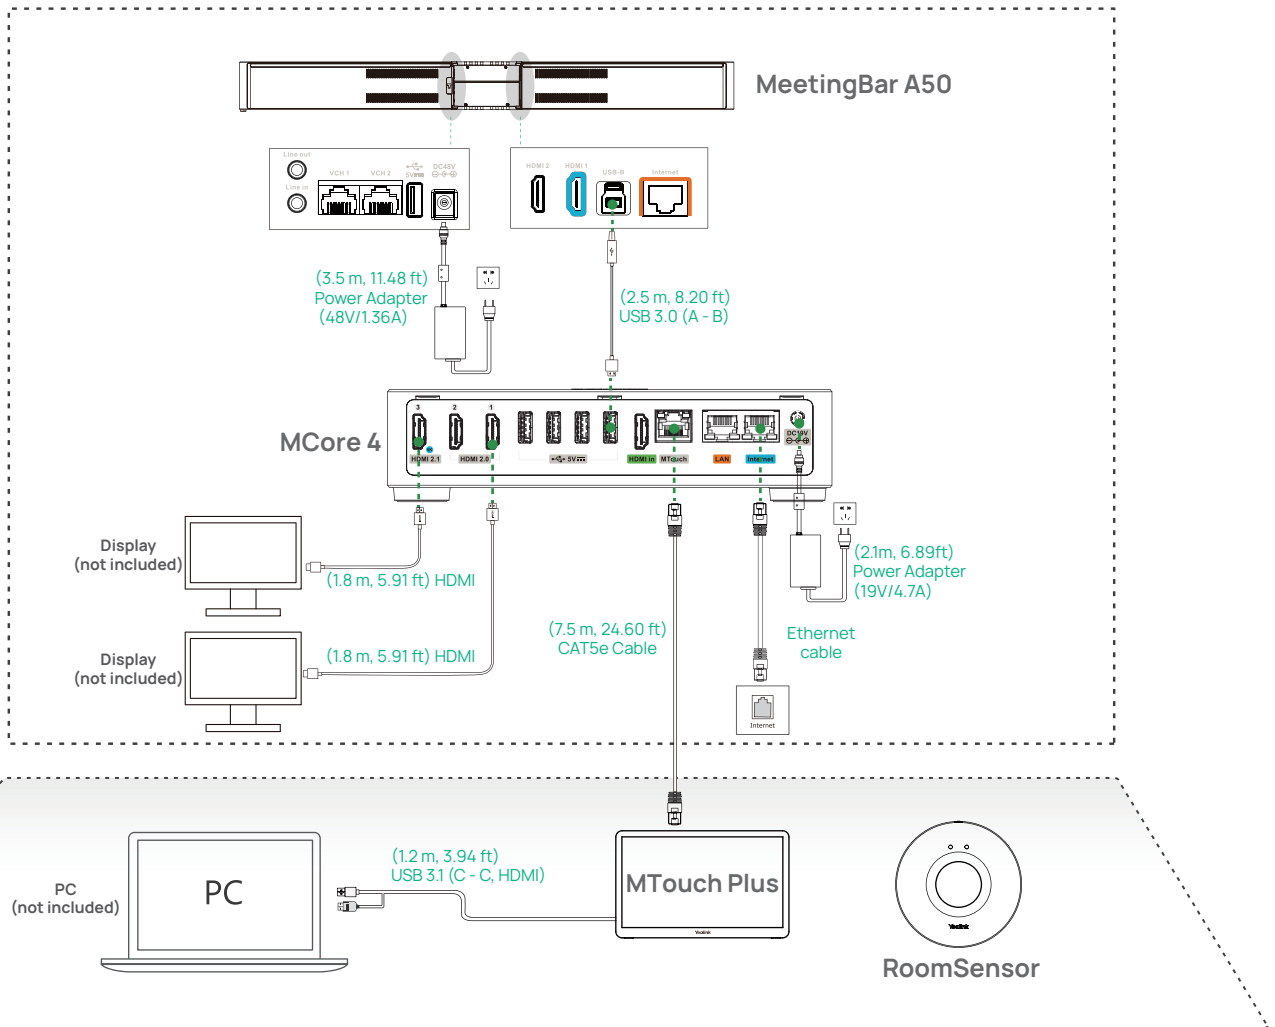

- When starting up the system for the first time, you need to connect a mouse to complete the initial configuration. We recommend using the wireless mouse and keyboard kit.
- Not included accessories requirements:
 - » Display: Resolution of 1080p or higher and with an HDMI port.
 - » PC: Equipped with HDMI or USB-C (support DP protocol) Port.
 - » PoE switch: If you use PoE to connect speakers or cameras, you need to use PoE+.
 - » Ethernet cable: CAT5e or higher ethernet cable.

Optional 2: Connect with MeetingDisplay

-  If not connected to the LAN port of MeetingDisplay, please connect to the external network port.

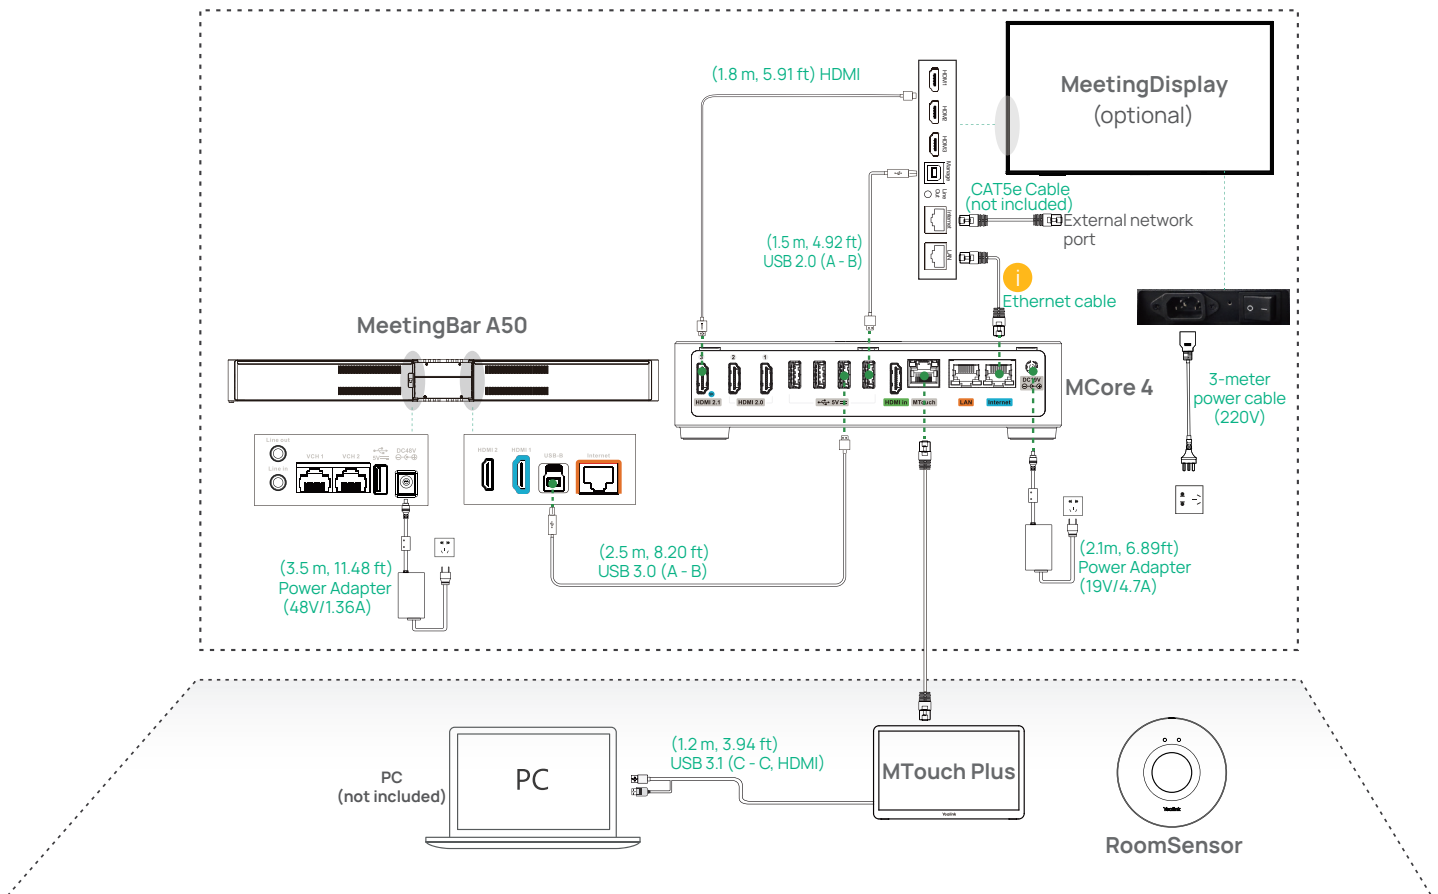

-  When starting up the system for the first time, you need to connect a mouse to complete the initial configuration. We recommend using the wireless mouse and keyboard kit.
- Not included accessories requirements:
 - » PC: Equipped with HDMI or USB-C (support DP protocol) Port.
 - » PoE switch: If you use PoE to connect speakers or cameras, you need to use PoE+.
 - » Ethernet cable: CAT5e or higher ethernet cable.


5 Initial Setup

1. Press the power button on the left side of the MCore 4 to start it up. The Microsoft Windows 11 IoT Enterprise operating system will automatically load. After the system initializes, you can use the MTouch Plus to log in and complete the system setup. The device will automatically launch the Microsoft Teams Meeting System app and enter the setup page.
2. Follow the on-screen prompts to select the desired language, country or region, and keyboard layout, then click **Get started**.
3. Read the End User Agreement and click **Accept**.
4. Enter the one-time password you created in the Teams Meeting Rooms Pro Admin Portal and click **Continue**. Alternatively, click **Manual Setup** in the lower-right corner, enter your account and password, and click **Finish**.

6 Features

Wireless Sharing

1. Connect the WPP30 to the USB port of the MTouch Plus. When pairing, the LED indicator of WPP30 is orange. When the pairing is successful, the LED indicator turns green breathing light.
2. Connect the paired WPP30 to the USB-A/USB-C port on your PC.
3. On the WPP30, press the presentation button to share the full screen.

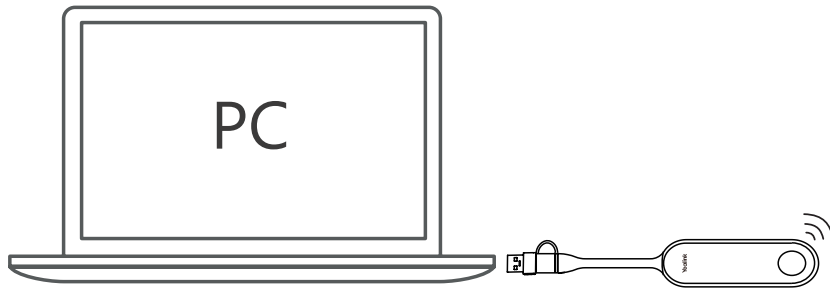

Pair with a RoomSensor

1. Switch the account from Microsoft Teams to Admin.
2. Open Yealink RoomConnect.
3. Tap **MTouch Plus** > **Sensor**.
4. Select **Add device** and follow the on-screen instructions to pair.

- An MTouch Plus can be paired with only one RoomSensor.
- The distance between the MTouch Plus and RoomSensor must be within 20m.



HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.

Please refer to the Quick Start Guide for each product for detailed Regulatory Notices.



YEALINK(XIAMEN) NETWORK TECHNOLOGY CO.,LTD.
Web: www.yealink.com
Copyright©2026 YEALINK(XIAMEN) NETWORK
TECHNOLOGY CO.,LTD.All rights reserved.