



Yealink Network Technology CO., LTD

Yealink ZVC860-C5-710 for Zoom Rooms System


Quick Start Guide(V1.0)

English | DEUTSCH | FRANÇAIS | ESPAÑOL


1 Minimum Requirements

- A display connected to MCore Pro (not included).
- A Zoom Rooms account (not included).
- Wired network environment (not included).


2 Package Contents




UVC86




CAT5e UTP (RJ45 - RJ45) Cable
(7.5m, 24.60ft)



USB 2.0 (A - B) Cable
(2.5m, 8.20ft)



Power Adapter (48V/0.7A)
(3.5m, 11.48ft)



Mounting Bracket



× 4



× 4



× 5

φ6 * 30 mm, white, Polyamide

4*30 FAHOZN3+ (+)

1/4" -20 UNC



× 2



M3*5.8KM0ZN3+


VCR20 Remote Control



× 5

(20 * 200 mm)

Cable Ties




Quick Start Guide


UVC86 Package



MCore Pro




(1.8 m, 5.91 ft)
HDMI Cable




(2.1 m, 6.89 ft)
Power Adapter (19V/4.74A)




(WH-85*3.0mm)
Screwdriver




(150*117*15mm)
Mounting Bracket



$\phi 6 * 30$ mm, white, Polyamide




4*30 FAHOZN3+ (+)



3*6PMOZN3+




(W25.4*L50mm,3M)
Velcro




Quick Start Guide


MCore Pro Package



MTouch Plus




(7.5m, 24.6ft)
CAT5e UTP (RJ45 - RJ45) Cable



(1.2m, 3.94ft)
USB 3.1 (C - C, HDMI) Cable



(WH-85*3.0mm)
Screwdriver




(207.44 mm * 126.99 mm)


Mounting Bracket




$\phi 6 * 30$ mm, white, Polyamide




4*30 FAHOZN3+ (+)



2.5*9.0FMHZN(+)



M8*60mm,SUS304




Washer



Wing Nuts




(L200*W62.5*T1.2mm)
Double-Coating Tape



Lock cable buckle




2.5*8.0PAHOZN3+(+)



Quick Start Guide


MTouch Plus Package



(5m, 16.4ft)

VCM35

(CAT5e UTP RJ45 Cable)



($\phi 50$ *T2mm)

Double-sided
adhesive




× 5

(20 * 200 mm)

Cable Ties




RJ45 8P8C - RJ45 8P8C




Quick Start Guide

VCM35 Package*2




MSpeaker II




(3m, 9.84ft)

3.5mm Audio Cable



(3.5 m, 11.48 ft)

Power Adapter (48V/0.7A)



× 2

($\phi 38$ *T1.2mm)

Silicone Pad



(116.16 mm * 166.41 mm)

Mounting Bracket



× 2

$\phi 6$ * 30 mm, white,
Polyamide




× 2

4*30 FAHOZN3+ (+)



× 2

M6*14.1FMHOZN3+



Quick Start Guide

MSpeaker II Package




RCH40



(7.5m, 24.6ft)

CAT5e UTP (RJ45 -
RJ45) Cable



(3.8m, 12.47ft)


Power Adapter
(48V/2A)



× 2


(W25.4*L50mm,3M)

Velcro



Quick Start Guide

RCH40 Package



RoomSensor



× 2

φ6 * 30 mm, white, Polyamide




× 2

4*30 FAHOZN3+ (+)



× 5

PIR Blocking Sticker




(φ80mm*T1.55mm)

3M Adhesive Tape



CR123A,3V



Quick Start Guide

RoomSensor Package




Pen Holder

Pen Holder

3 Installation

- MCore Pro supports: mount on the wall, mount on the TV, stick to the table.
- MTouch Plus supports: put on a table, paste on a table, fixed on a table, mount on the wall.
- UVC86 supports: put on a flat surface, mount on top of a display, mount on the wall, mount on the ceiling, mount on the TV mount.
- MSpeaker II supports: mount on a wall, stick to the table.
- RCH40 supports: put on the table, stick under the table, stick on the side of the table.
- RoomSensor supports: mount on the ceiling, mount on the wall.
- Install and deploy the accessories in the system according to the environment and actual needs. For how to install and deploy, please refer to the quick start guide of each product.

4 Connection

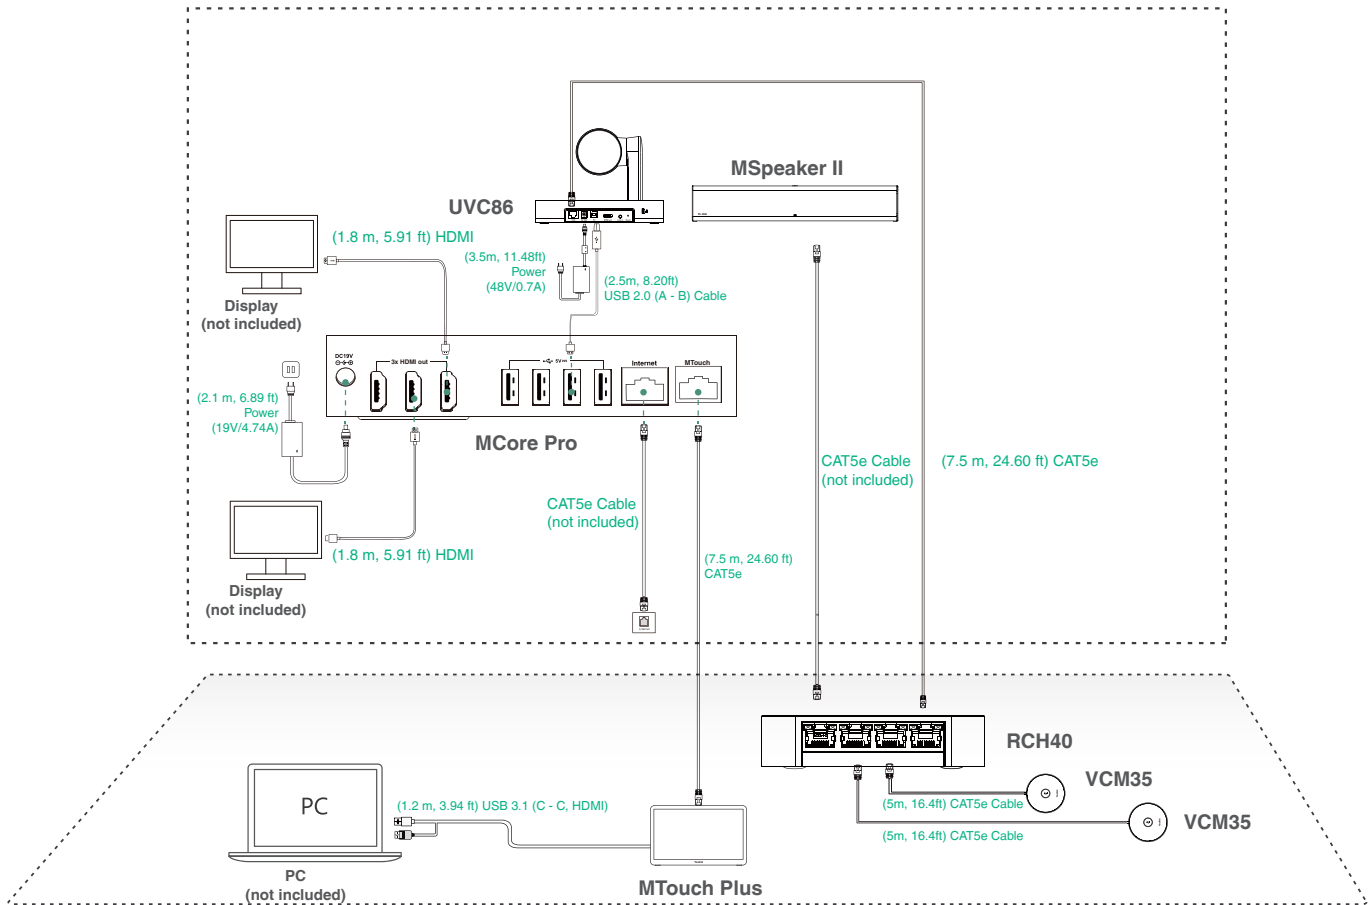

- Do not connect RCH40 to the Internet, otherwise it will cause network abnormalities.
- When starting up the system for the first time, you need to connect a mouse to complete the initial configuration. We recommend using the wireless mouse and keyboard kit.
- Not included accessories requirements:
 - » Display: Resolution of 1080p or higher and with an HDMI port.
 - » PC: Equipped with HDMI or USB-C (support DP protocol) Port.
 - » Ethernet cable: CAT5e or higher ethernet cable.
 - » HDMI: Standard HDMI cable.

5 Initial Setup

1. Press the power button on the bottom left of MCore Pro, and the Microsoft Windows IoT Enterprise Edition operating system will be automatically loaded after starting MCore Pro.

Note: When starting up the system for the first time, you need to connect a mouse to complete the initial configuration. We recommend using the wireless mouse and keyboard kit.

After the system is initialized, you can use MTouch Plus to complete the system login and settings, and the device will automatically start the Zoom conference system application and enter the setting page.

2. Log in to your Zoom Rooms account.
 - Tap **Sign In** on the start meeting screen.
 - Enter your email address and password.
 - Tap **Sign In**.

6 Features

Control UVC86 Camera Position

1. Tap Camera Control during a meeting.
2. Tap  or  to zoom camera in/out.
3. Tap the navigation keys to pan/tilt the camera.

Pair with a RoomSensor

1. Switch to Admin mode.
2. Open Yealink RoomConnect Software from Desktop.
3. Go to **MTouch Plus > Sensor**.
4. Add sensor. Select the right sensor to pair.

Remove the back cover of RoomSensor, you will see its name on the top. Then select accordingly.

-  A MTouch Plus can be paired with one RoomSensor at most.
- The distance between MTouch Plus and RoomSensor needs to be within 20m.



HDMI, the HDMI logo, and High-Definition Multimedia Interface are trademarks or registered trademarks of HDMI Licensing LLC.

Please refer to the Quick Start Guide for each product for detailed Regulatory Notices.

About Yealink

Yealink (Stock Code: 300628) is a global-leading provider of Unified Communication & Collaboration Solutions specialized in video conferencing, voice communications, and collaboration, dedicated to helping every person and organization embrace the power of "Easy Collaboration, High Productivity".

With best-in-class quality, innovative technology, and user-friendly experiences, Yealink is one of the best providers in more than 140 countries and regions, ranks No.1 in the global market share of IP Phone, and is the Top 5 leader in the video conferencing market (Frost & Sullivan, 2021).

For more information about Yealink, [click here](#).

Copyright

Copyright © 2024 YEALINK(XIAMEN) NETWORK TECHNOLOGY CO., LTD.


All rights reserved. No parts of this publication may be reproduced or transmitted in any form or by any means, electronic or mechanical, photocopying, recording, or otherwise, for any purpose, without the express written permission of Yealink(Xiamen) Network Technology CO., LTD.

Technical Support

Visit Yealink WIKI (<http://support.yealink.com/>) for firmware downloads, product documents, FAQ, and more. For better service, we sincerely recommend you to use Yealink Ticketing system (<https://ticket.yealink.com>) to submit all your technical issues.



YEALINK NETWORK TECHNOLOGY CO.,LTD.
Web: www.yealink.com
Addr: No.666 Hu'an Rd,Huli District Xiamen City, Fujian, P.R.C
Copyright©2024 Yealink Inc. All rights reserved.

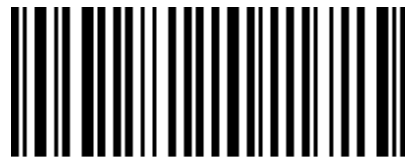

430104002802